


Flanges Dimensions

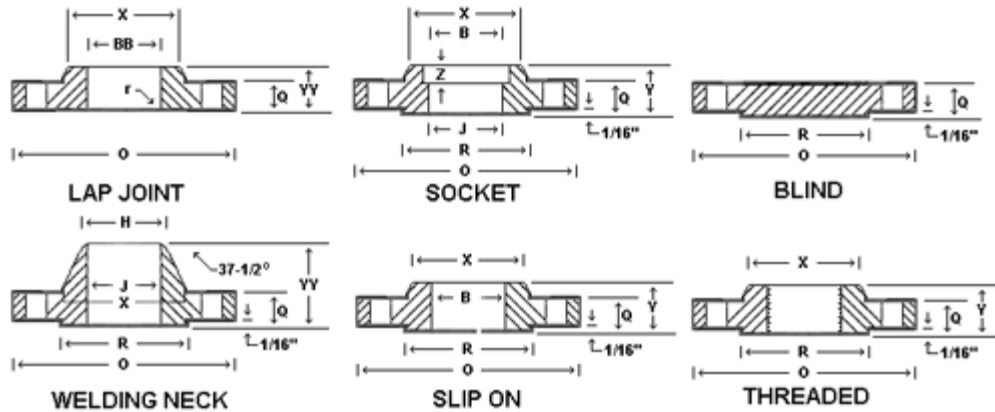

150 LB. FLANGES

Normal pipe size	Outside dia. of flange	Minimum thickness of flange	Overall Length			Bolt Circle	No. and Size of Holes		O.D. of raised face
			Welding neck	Slip-on & socket welding	Lap Joint		No.	dia.	
	O	Q	Y			Diam.	No.	dia.	R
1/2	89	11.2	47.6	15.9	15.9	60.5	4	15	35
3/4	117	15.9	57.2	25.4	25.4	82.5	4	15	43
1	108	14.3	55.6	17.5	17.5	79.5	4	15	51
1.1/4	117	15.9	57.2	20.6	20.6	89.0	4	15	64
1.1/2	127	17.5	61.9	22.2	22.2	98.5	4	15	73
2	152	19.1	63.5	25.4	25.4	120.5	4	19	92
2.1/2	178	22.3	69.8	28.6	28.6	139.5	4	19	105
3	190	23.9	69.8	30.2	30.2	152.5	4	19	127
3.1/2	216	23.9	71.4	31.8	31.8	178.0	8	19	140
4	229	23.9	86.2	33.3	33.3	190.5	8	19	157
5	254	23.9	88.9	36.5	36.5	216.0	8	22	186
6	279	25.4	88.9	39.7	39.7	241.5	8	22	216
8	343	28.6	101.6	44.4	44.4	298.5	8	22	270
10	406	30.2	101.6	49.2	49.2	362.0	12	25	324
12	483	31.8	114.3	55.6	55.6	432.0	12	25	381
14	533	35.0	127.0	57.2	79.4	476.0	12	29	413
16	597	36.6	127.0	63.5	87.3	539.5	16	29	470
18	635	39.7	139.7	68.3	96.8	578.0	16	32	533
20	698	42.9	144.5	73.0	103.2	635.0	20	32	584
24	813	47.7	152.4	82.6	111.1	749.5	20	35	692

300 LB. FLANGES

Normal pipe size	Outside dia. of flange	Minimum thickness of flange	Overall Length			Bolt Circle	No. and Size of Holes		O.D. of raised face
			Welding neck	Slip-on & socket welding	Lap Joint		No.	dia.	
	O	Q	Y			Diam.		R	
1/2	95	14.3	52.4	22.2	22.2	666.5	4	15	35
3/4	117	15.9	57.2	25.4	25.4	82.4	4	19	43
1	124	17.5	61.9	27.0	27.0	89.0	4	19	51
1-1/4	133	19.1	65.1	27.0	27.0	98.5	4	19	64
1-1/2	156	20.7	68.3	30.2	30.2	114.5	4	22	73
2	165	22.3	69.8	33.3	33.3	127.0	8	19	92
2-1/2	190	25.4	76.2	38.1	38.1	149.0	8	22	105
3	210	28.6	79.4	42.9	42.9	168.0	8	22	127
4	254	31.8	85.7	47.6	47.6	200.0	8	22	157
5	279	35.0	98.4	50.8	50.8	235.0	8	22	186
6	313	36.6	98.4	52.4	52.4	270.0	12	22	216
6	381	41.3	111.1	61.9	91.9	330.0	12	25	270
10	444	47.7	117.5	66.7	95.3	387.5	16	29	324
12	521	50.8	130.2	73.0	101.6	451.0	16	32	381
14	584	54.0	142.9	76.2	111.1	514.5	20	32	413
16	648	57.2	146.0	82.6	120.7	571.5	20	35	470
18	711	60.4	158.8	88.9	130.2	628.5	24	35	533
20	775	63.5	161.9	95.2	139.7	686.0	24	35	584
24	914	69.9	168.3	106.4	152.4	843.0	24	41	692

600 LB. FLANGES

Normal pipe size	Outside dia. of flange	Minimum thickness of flange	Overall Length			Bolt Circle	No. and Size of Holes		O.D. of raised face
			Welding neck	Slip-on & socket welding	Lap Joint		No.	dia.	
	O	Q	Y			Diam.			R
1/2	95	14.3	52.4	22.2	22.2	66.5	4	15	35
3/4	117	15.9	57.2	25.4	25.4	82.5	4	19	43
1	124	17.5	61.9	27.0	27.0	89.0	4	19	51
1-1/4	133	20.7	66.7	28.6	28.6	98.5	4	19	64
1-1/2	156	22.3	69.8	31.8	31.8	114.5	4	22	73
2	165	25.4	73.0	36.5	36.5	127.0	8	19	92
2-1/2	190	28.6	79.4	41.3	41.3	149.0	8	22	105
3	210	31.8	82.6	46.0	46.0	168.0	8	22	127
3-1/2	229	35.0	85.7	49.2	49.2	184.0	8	25	140
4	273	38.1	101.6	54.0	54.0	216.0	8	25	157
5	330	44.5	114.3	60.3	60.3	266.5	8	29	186
6	356	47.7	117.5	66.7	66.7	292.0	12	29	216
8	419	55.6	133.4	76.2	76.2	349.0	12	32	270
10	508	63.5	152.4	85.7	115.1	432.0	16	85	324
12	559	66.7	155.6	92.1	111.1	489.0	20	35	381
14	603	69.9	165.1	93.7	117.5	527.0	20	38	413
16	686	76.2	177.8	106.4	127.0	603.0	20	41	470
18	743	82.6	184.2	117.6	139.7	654.0	20	45	533
20	813	88.9	190.5	127.0	165.1	724.0	24	45	584
24	940	101.6	203.2	139.7	184.2	838.0	24	51	692

900 LB. FLANGES

Normal pipe size	Outside dia. of flange	Minimum thickness of flange	Overall Length			Bolt Circle	No. and Size of Holes		O.D. of raised face
			Welding neck	Slip-on & socket welding	Lap Joint		No.	dia.	
	O	Q	Y			Diam.			R
1/2	121	22.3	60.3	31.8	31.8	82.5	4	22	35
3/4	130	25.4	69.8	34.9	34.9	89.0	4	22	43
1	149	28.6	78.0	41.3	41.3	101.5	4	25	51
1-1/4	159	28.6	78.0	41.3	41.3	111.0	4	25	64
1-1/2	178	31.8	82.6	44.4	44.4	124.0	4	29	78
2	216	38.1	101.6	57.2	57.2	165.0	8	25	92
2-1/2	244	41.3	104.8	63.5	63.5	190.5	8	29	105
8	241	38.1	101.6	54.0	54.0	190.5	8	25	127
3-1/2									
4	292	44.5	114.3	69.8	69.8	235.0	8	32	157
5	349	50.8	127.0	79.4	79.4	279.5	8	35	186
6	381	55.6	189.7	85.7	85.7	317.5	12	32	216
8	470	68.5	161.9	101.8	114.3	393.5	12	38	270
10	546	69.9	184.2	108.0	127.0	470.0	16	38	324
12	610	79.4	200.0	117.5	142.9	533.5	20	38	381
14	584	54.0	142.9	76.2	111.1	514.5	20	32	413
16	711	60.4	158.8	88.9	130.2	628.5	24	35	533
20	775	63.5	161.9	95.2	139.7	686.0	24	35	584
24	914	69.9	168.3	106.4	152.4	843.0	24	41	692

1500 LB. FLANGES

Normal pipe size	Outside dia. of flange	Minimum thickness of flange	Overall Length			Bolt Circle	No. and Size of Holes		O.D. of raised face
			Welding neck	Slip-on & socket welding	Lap Joint		Diam.	No. dia.	
	O	Q	Y						
1/2	12.1	22.3	60.3	31.8	31.8	82.5	4	22	35
3/4	130	25.4	69.8	34.9	34.9	89.0	4	22	43
1	149	28.6	73.0	41.3	41.3	101.5	4	25	51
1-1/4	159	28.6	73.0	41.3	41.3	111.0	4	25	64
1-1/2	178	31.8	82.6	44.4	44.4	124.0	4	29	73
2	216	38.1	101.6	57.2	57.2	165.0	8	25	92
2-1/2	244	41.3	104.8	63.5	63.5	190.5	8	29	105
3	267	47.7	117.5	73.0	73.0	203.0	8	32	127
3-1/2									
4	311	54.0	123.8	90.5	90.5	241.5	8	35	157
5	375	73.1	155.5	104.8	104.8	292.0	8	41	186
6	394	82.6	171.4	119.1	119.1	317.5	12	38	216
8	483	92.1	212.7	142.9	142.9	393.5	12	45	270
10	584	108.0	254.0	158.8	177.8	482.5	12	51	324
12	673	123.9	282.9	181.0	219.1	571.5	16	54	381
14	749	133.4	298.4	-----	241.3	635.0	16	60	413
16	826	146.1	311.2	-----	260.4	705.0	16	51	470
18	914	162.0	327.0	-----	276.2	474.5	16	73	538
20	984	117.8	355.4	-----	292.1	832.0	16	80	584
24	1168	203.2	406.4	-----	330.2	990.5	16	92	692

2500 LB. FLANGES

Normal pipe size	Outside dia. of flange	Minimum thickness of flange	Overall Length			Bolt Circle	No. and Size of Holes		O.D. of raised face
			Welding neck	Slip-on & socket welding	Lap Joint				
	O	Q	Y			Diam.	No.	dia.	R
1/2	133.4	30.2	73.0	39.7	39.7	88.9	4	22	34.9
3/4	139.7	31.8	79.4	42.9	42.9	95.3	4	22	42.9
1	158.8	34.9	88.9	47.6	47.6	108.0	4	25	50.8
1-1/4	184.2	38.1	95.3	52.4	52.4	130.2	4	29	63.5
1-1/2	203.2	44.5	111.1	60.3	60.3	146.0	4	32	73.0
2	235.0	50.8	127.0	69.9	69.9	171.5	8	29	92.1
2-1/2	266.7	57.2	142.9	79.4	79.4	196.9	8	32	104.8
3	304.8	66.7	168.3	92.1	92.1	228.6	8	35	127.0
3-1/2									
4	355.6	76.2	190.5	108.0	108.0	273.0	8	41	157.2
5	419.1	92.1	228.6	130.2	130.2	323.9	8	48	185.7
6	482.6	108.0	273.1	152.4	152.4	268.3	8	54	215.9
8	552.5	127.0	317.5	177.8	177.8	438.2	12	54	269.9
10	673.1	165.1	419.1	228.6	228.6	539.8	12	67	323.9
12	762.0	184.2	463.6	254.0	254.0	619.1	12	73	381.03
14	---	---	---	---	---	---	--	---	---
16	---	---	---	---	---	---	--	---	---
18	---	---	---	---	---	---	--	---	--
20	---	---	---	---	---	---	--	---	--
24	---	---	---	---	---	---	--	---	--

WELDING NECK FLANGE BORES

No m. pip e Siz e	Outsi de Diam	Lig ht Wa ll 6	Sch ed. 20	Sch ed. 30	Std · Wa ll	Sch ed. 40	Sch ed. 60	Extr a Stron g	Sch ed. 80	Sch ed. 100	Sch ed. 120	Sch ed. 140	Sch ed. 160	Dou ble Extr a Stron g
1/2	0.840	.674	0.622	0.622	0.546	0.546	0.464	0.252
3/4	1.050	.884	0.824	0.824	0.742	0.742	0.612	0.434
1	1.315	1.097	1.049	1.049	0.957	0.957	0.815	0.599
1-1/4	1.660	1.442	1.380	1.380	1.278	1.278	1.160	0.896
1-1/2	1.900	1.682	1.610	1.610	1.500	1.500	1.338	1.100
2	2.375	2.157	2.067	2.067	1.939	1.939	1.687	1.503
2-1/2	2.875	2.635	2.469	2.469	2.323	2.323	2.125	1.771
3	3.500	3.260	3.068	3.068	2.900	2.900	2.624	2.300
3-1/2	4.000	3.760	3.548	3.548	3.364	3.364	2.728
4	4.500	4.260	4.026	4.026	3.826	3.826	3.624	3.438	3.152
5	5.563	5.295	5.047	5.047	4.813	4.813	4.563	4.313	4.063
6	6.625	6.357	6.065	6.065	5.761	5.761	5.501	5.187	4.897
8	8.625	8.329	8.125	8.071	7.981	7.981	7.813	7.625	7.625	7.437	7.187	7.001	6.813	6.875
10	10.750	10.420	10.250	10.136	10.020	10.020	9.750	9.750	9.562	9.312	0.062	8.750	8.500	8.750
12	12.750	12.390	12.250	12.090	11.938	11.938	11.626	11.626	11.374	11.062	10.750	10.500	10.500	10.750
14	14.000	13.500	13.376	13.250	13.124	13.124	12.812	12.812	12.500	12.124	11.814	11.500	11.500
16	16.000	15.500	15.376	15.250	15.000	15.000	14.688	14.688	14.312	13.938	13.564	13.124	13.124
18	18.000	17.500	17.376	17.124	16.876	16.876	16.500	16.500	16.124	15.688	15.250	14.876	14.438
20	20.000	19.500	19.250	19.000	18.812	18.812	18.376	18.376	17.938	17.438	17.000	16.500	16.062
24	24.000	23.500	23.250	22.876	22.624	22.624	22.062	22.062	21.562	20.938	20.376	19.876	19.312
30	30.000	29.376	29.000	28.750	29.250	29.250	29.000
36	36.000	35.376	35.000	34.750	35.250	35.250	34.500	34.500	35.000
42	42.000	41.250	41.000	40.750	41.250	41.250	41.000

DIN 2527

	NW	D	Flange b	k	Raised Face		Number	Bolts	Bolts	Dia. of Bolt Hole d ₂	Weight of One Flange (7.85 kg/dm ³)	
					d ₄	f					Type-B kg	Type-C kg
ND-6	10	75	12	50	35	2	4	M10	-	11.5	0.38	0.33
	15	80	12	55	40	2	4	M10	-	11.5	0.44	0.38
	20	90	14	65	50	2	4	M10	-	11.5	0.65	0.59
	25	100	14	75	60	2	4	M10	-	11.5	0.82	0.74
	32	120	14	90	70	2	4	M12	(1/2")	14.0	1.17	1.07
	40	130	14	100	80	3	4	M12	(1/2")	14.0	1.39	1.21
	50	140	14	110	90	3	4	M12	(1/2")	14	1.62	1.43
	65	160	14	130	110	3	4	M12	(1/2")	14	2.44	2.21
	80	190	16	150	128	3	4	M16	(3/8")	18	3.43	3.09
	100	210	16	170	148	3	4	M16	(5/8")	18	4.76	4.37
	125	240	18	200	178	3	8	M16	(5/8")	18	6.11	5.68
	150	265	18	225	202	3	8	M16	(5/8")	18	7.51	7.02
	(175)	295	20	255	232	3	8	M16	(5/8")	18	10.4	9.85
	200	320	20	280	258	3	8	M16	(5/8")	18	12.3	11.7
	250	375	22	335	312	3	12	M16	(5/8")	18	18.3	17.6
300	440	22	395	365	4	12	M20	(3/4")	23	25.3	24.0	
350	490	22	445	415	4	12	M20	(3/4")	23	31.6	30.1	
400	540	22	495	465	4	16	M20	(3/4")	23	38.4	36.4	
500	645	24	600	570	4	20	M20	(3/4")	23	60.4	58.1	
ND-10 (Note from 10 mm to 175 mm see ND-16)	200	340	24	295	268	3	8	M20	(3/4")	23	16.5	15.6
	250	395	26	350	320	3	12	M20	(3/4")	23	24.0	23.1
	300	445	26	400	370	4	12	M20	(3/4")	23	30.9	29.4
	350	505	26	460	430	4	16	M20	(3/4")	23	40.6	38.0
	400	565	26	515	482	4	16	M24	(3/4")	27	49.4	47.5
500	670	28	620	585	4	20	M24	(3/4")	27	75.0	72.7	
ND-16 Note : For DIN 2527 ND-10-4 Holes	10	90	14	60	40	2	4	M12	(1/2")	14	0.63	0.56
	15	95	14	65	45	2	4	M12	(1/2")	14	0.72	0.64
	20	105	16	75	58	2	4	M12	(1/2")	14	1.01	0.93
	25	115	14	60	40	2	4	M12	(1/2")	14	1.23	1.13
	32	140	14	65	45	2	4	M16	(5/8")	18	1.80	1.66
	40	150	16	75	58	2	4	M16	(5/8")	18	2.09	1.85
	50	165	18	125	102	3	4	M16	(5/8")	18	2.88	2.59
	65	185	18	145	122	3	4	M16	(5/8")	18	3.66	3.33
	80	200	20	160	138	3	4/8	M16	(5/8")	18	4.77	4.34
	100	220	20	180	158	3	8	M16	(5/8")	18	2.88	2.59
	125	250	22	210	188	3	8	M16	(5/8")	18	3.66	3.33
	150	285	22	240	212	3	8	M16	(5/8")	18	4.77	4.34
	100	220	20	180	158	3	8	M16	(5/8")	18	5.65	5.26
	125	250	22	210	188	3	8	M16	(5/8")	18	8.42	7.67
	150	285	22	240	212	3	8	M20	(3/4")	23	10.4	9.85
(175)	315	24	270	242	3	8	M20	(3/4")	23	14.0	13.5	
200	340	24	295	268	3	12	M20	(3/4")	23	16.1	15.6	

	250	405	26	355	320	3	12	M20	(7/8")	27	24.9	23.9
	300	460	28	410	378	4	12	M24	(7/8")	27	35.1	33.6
	350	520	30	470	438	4	16	M24	(7/8")	27	47.8	46.2
	400	580	32	525	490	4	16	M27	(1")	30	63.5	61.5
	500	715	34	650	610	4	20	M30	(1-1/8")	33	102	99.5
ND-25 Note: From 10mm to 150 mm see ND-40	(175)	330	28	280	248	3	12	M24	(7/8")	27	17.3	16.5
	200	360	30	310	278	3	12	M24	(7/8")	27	22.3	21.5
	250	425	32	370	335	3	12	M24	(1")	30	33.5	32.5
	300	485	34	430	395	4	16	M27	(1")	30	46.3	44.7
	350	555	38	490	450	4	16	M30	(1-1/8")	33	68.0	65.9
400	620	40	550	505	4	16	M33	(1-1/4")	36	89.7	87.0	
	500	730	44	660	615	4	20	M33	(1-1/4")	36	138	134
ND-40	10	90	16	60	40	2	4	M12	(1/2")	14	0.72	0.62
	15	95	16	65	45	2	4	M12	(1/2")	14	0.81	0.74
	20	105	16	75	58	2	4	M12	(1/2")	14	1.24	1.05
	25	115	18	85	68	2	4	M12	(1/2")	14	1.38	1.31
	32	140	18	100	78	2	4	M12	(5/8")	18	2.03	1.82
	40	150	18	110	88	2	4	M12	(5/8")	18	2.35	2.11
	50	165	20	125	102	3	4	M16	(5/8")	18	3.20	2.91
	65	185	22	145	122	3	8	M16	(5/8")	18	4.29	4.13
	80	200	24	160	138	3	8	M16	(5/8")	18	5.88	5.21
	100	235	24	190	162	3	8	M20	(3/4")	23	7.54	7.08
	125	270	26	220	188	3	8	M24	(7/8")	27	10.8	10.4
	150	300	28	250	218	3	8	M24	(7/8")	27	14.5	13.9
	175	350	32	295	260	3	12	M27	(1")	30	22.1	21.3
	200	375	34	320	285	3	12	M27	(1")	30	27.2	26.2
	250	450	38	385	345	3	12	M27	(1-1/8")	30	43.8	43.1
	300	515	42	450	410	4	16	M30	(1-1/8")	33	63.3	62.2
	350	580	46	510	465	4	16	M33	(1-1/8")	36	89.5	87.2
400	660	50	585	535	4	16	M36	(1-1/8")	39	127	124	
	500	755	52	670	615	4	20	M39	(1-1/2")	42	172	168

DIN 2576
FLANGES, SLIP-ON TYPE FOR BRITISH OR WELDING NOMINAL PRESSURE 10

Pipe		Flange				Bolts				Weight of one flange 7.85 kg/ dm ³) kg
NW	d1	ds	D	b1	k	Number	Thread	d2		
10	14 17.2)	14.5 17.7	90	14	60	4	M12 (1/2")	14	0.613 0.605	
15	20 21.3)	20.5 21.8	95	14	65	4	M12 (1/2")	14	0.675 0.669	
20	25 26.9)	25.5 27.4	105	16	75	4	M12 (1/2")	14	0.947 0.936	
25	30 33.7)	30.5 34.2	115	16	85	4	M12 (1/2")	14	1.14 1.11	
32	38 42.4)	38.5 42.9	140	16	100	4	M16 (5/8")	18	1.66 1.62	
40	44.5 48.3)	45 48.8	150	16	110	4	M16 (5/8")	18	1.89 1.86	
50	57 60.3)	57.5 60.8	165	18	125	4	M16 (5/8")	18	2.51 2.47	
65	76.1)	76.6	185	18	145	4	M16 (5/8")	18	3.00	
80	88.9)	89.4	200	20	160	4	M16 (5/8")	18	3.79	
100	108 114.3)	108.5 114.8	220	20	180	8	M16 (5/8")	18	4.20 4.03	
125	133 139.7)	133.5 140.2	250	22	210	8	M16 (5/8")	18	5.71 5.46	
150	159 168.3)	159.5 168.8	285	22	210	8	M16 (3/4")	23	6.72 6.57	
175	191 193.7)	192 194.7	315	24	270	8	M20 (3/4")	23	8.60 8.45	
200	216 219.1)	216 220.1	340	24	295	8	M20 (3/4")	23	9.50 9.31	
250	267 273)	268 274	395	26	350	12	M20 (3/4")	23	12.5 11.9	
400	406.4 419)	407.4 420	565	32	515	16	M24 (7/8")	27	27.9 25.9	
500	508) 521	509 522	670	38	620	20	M24 (7/8")	27	37.9 41.1	

DIN 2632
WELDING NECK FLANGES FOR NOMINAL PRESSURE 10

Pipe		Flange				Neck				Raised face		Bolts			Weight of one flange 7.85 kg/dm ³) kg	
NW	d1	D	b	k	h1	d3	s	f	h2	d4	f	No.	Thread	d2		
200	216	340	24	295	62	232	5.9	10	16	268	3	8				11.3
	219.1					235										235
250	267	395	26	350	68	285	6.3	12	16	320	3					17.6
	273					295										295
300	318	445	26	400	68	335	7.1	12	16	370	4	12	M20	(3/4")	23	17.6
	323.9					344										344
350	355.6	505	26	460	68	385	7.1	12	16	430	4	16				21.4
	368					385										385
400	406.4	565	26	515	72	440	7.1	12	16	482	4					26.1
	419					440										440
500	508	670	28	620	75	542	7.1	12	16	585	4	20	M24	(3/8")	27	34.7
	521					542										542
600	609.6	780	28	725	80	642	7.1	12	18	685	5		M27	(1")	30	42.2
	622					642										642



DIN 2633
WELDING NECK FLANGES NOMINAL PRESSURE 16

Pipe		Flange				Neck				Raised face		Bolts			Weight of one flange 7.85 kg/dm ³ kg					
NW	d1	D	b	k	h1	d3	s	r	h2	d4	f	No.	Thread	d2						
10	14	90	14	60	35	25	1.8	4	6	40	2	4	M12	(1/2")	14	0.580				
	17.2					28														
15	20	95	14	65	35	30	2	4	6	45	2									0.648
	21.3					32														
20	25	105	16	85	38	42	2.3	4	6	58	2									0.952
	26.9					45														
25	30	115	16	85	38	42	2.6	4	6	68	2									1.14
	33.7					45														
32	38	140	16	100	40	52	2.6	4	6	78	2						1.69			
	42.4					56														
40	44.5	150	16	100	40	60	2.6	6	6	88	3						1.86			
	48.3					64														
50	57	165	18	125	45	72	2.9	6	8	102	3						2.53			
	60.3					75														
65	76.1	185	18	145	45	90	2.9	6	10	122	3						3.06			
80	88.9	200	20	160	50	105	3.2	8	10	138	3		4/8				3.70			
100	108	220	20	180	52	125	3.6	8	12	158	3	8	M16	(5/8")	18	4.62				
	114.3					131														
125	133	250	22	210	55	150	4	8	12	188	3									6.30
	139.7					156														
150	159	285	22	240	55	150	4	8	12	188	3						M20	(3/4")	23	7.75
	168.3					156														
175	191	315	24	270	60	208	5.4	10	12	242	3					8				10.0
	193.7					210														
200	216	340	24	295	62	232	5.9	10	16	268	3		M20	(3/4")	23	11.0				
	219.1					235														
250	267	405	26	355	70	285	6.3	12	16	320	3	12				15.6				
	273					292														
300	318	460	28	410	78	388	7.1	12	16	378	4		M24	(7/8")	27	22.0				
	323.9					344														
350	355.6	520	30	470	82	390	8	12	16	438	4	16				28.7				
	368																			
400	406.4	580	32	525	85	445	8	12	16	490	4		M27	(1")	30	36.3				
	419																			
500	508	715	34	650	90	548	8	12	16	610	4	20	M30	(1-	33					

	521													1/8"		59.3
600	609.6	840	36	770	95	652	8.8	12	18	725	5		M33	(1-1/4")	36	
	622															73.4
700	711.2	910	36	840	100	755	8.8	12	18	795	5	24				
	720															75.0
800	812.8	1025	38	950	105	855	10	12	20	900	5		M36	(1-3/8")	39	
	820															99.0
900	914.4	1125	40	1050	110	955	10	12	20	1000	5	28				
	920															119
1000	1016	1255	42	1170	120	1058	10	16	22	1115	5		M39	(1-1/2")	42	
	1020															159



DIN 2634
WELDING NECK FLANGE NOMINAL PRESSURE 25

Pipe		Flange				Neck				Raised face		Bolts			Weight of one flange (7.85 kg/dm ³) kg.										
NW	d1	D	b	k	h1	d3	s	r	h2	d4	f	No.	Thread	d2											
175	(191)	330	28	280	75	215	5.6	10	15	248	3	12	M24	(7/8")	27	13.4									
	193.7					218										17.0									
200	216	360	30	310	80	240	6.3	10	16	278	3					16	M27	(1")	30	24.4					
	219.1					244														31.2					
250	267	425	32	370	88	292	7.1	12	18	335	3									16	M30	(1-1/8")	33	45.0	
	273					298																		58.7	
300	318	485	34	430	92	345	8	12	18	395	4		20	M33	(1-1/4")									36	86.1
	323.9					352																			101
350	355.6	555	38	490	100	398	8	12	20	450	4					20	M36	(1-3/8")	39						101
	368																								452
400	406.4	620	40	550	110	452	8.8	12	20	505	4									20	M36	(1-3/8")	39		101
	419																								558
500	508	730	44	660	125	558	10	12	20	615	4	20	M36	(1-3/8")	39									101	
	521																							660	101
600	609.6	845	46	770	125	660	11	12	20	720	5					20	M36	(1-3/8")	39					101	
	622																							660	101

**DIN 2642, DIN Connections
LOOSE FLANGE FOR FLANGE COLLAR PN 10**

Nom Pipe size	Flange D mm	d5 mm	b mm	r mm	k mm	Drilling Number	d2 mm	Weight kg	Collar g mm
10	90	16	16	5	60	4	15	0.23	45
15	95	23	16	5	65	4	15	0.26	50
20	105	28	16	5	75	4	15	0.30	60
25	115	33	16	5	85	4	15	0.37	70
32	140	42	16	5	100	4	18	0.54	82
40	150	50	16	5	110	4	18	0.5	0.92
50	165	62	18	5	125	4	18	0.80	107
65	185	81	18	5	145	4	18	0.90	127
80	200	94	20	5	160	4	18	1.28	142
100	220	113	20	5	180	8	18	1.37	162
125	250	138	22	6	210	8	18	1.78	192
150	285	164	22	6	240	8	22	2.27	218
175	315	195	24	6	270	8	22	2.90	248
200	340	222	24	7	295	8	22	3.16	273
250	395	273	26	7	350	12	22	4.22	328
300	445	324	26	7	400	12	22	4.80	378
350	505	374	26	8	460	16	22	5.85	438
400	565	426	32	8	515	16	25	8.45	490
450	615	475	32	8	565	20	25	9.45	540
500	670	530	34	8	620	20	25	11.35	595
600	780	630	36	10	725	20	30	15.30	695
700	895	730	40	10	840	24	30	21.40	810
800	1015	832	44	10	950	24	34	30.50	916

DIN 2635
WELDING NECK FLANGES NOMINAL PRESSURE 40

Pipe		Flange				Neck				Raised		Bolts			Weight of one flange 7.85 kg/dm ³) kg	
NW	d1	D	b	k	h1	d3	s	r	h2	d4	f	No.	Thread	d2		
10	14	90	16	60	35	25	1.8	4	6	40	2	4	M12	(1/2")	14	0.661
	17.2					28										
15	20	95	16	65	38	30	2	4	6	45	2					0.746
	21.3					32										
20	25	105	18	75	40	38	2.3	4	6	58	2					1.06
	26.9					40										
25	30	115	18	85	40	42	2.6	4	6	68	2					1.29
	33.7					46										
32	38	140	18	100	42	52	2.6	6	6	78	2					1.88
	42.4					56										
40	44.5	150	18	110	45	60	2.6	6	7	88	3					2.33
	48.3					64										
50	57	165	20	125	48	72	2.9	6	8	102	3		M16	(5/8")	18	2.82
	60.3					75										
65	76.1	185	22	145	52	90	2.9	6	10	122	3					3.74
80	88.9	200	24	160	58	105	3.2	8	12	138	3					4.75
100	108	235	24	190	65	128	3.6	8	12	138	3	8	M20	(3/4")	23	6.52
	114.3					134										
125	133	270	26	220	68	155	4	8	12	188	3	8	M24	(7/8")	27	9.07
	139.7					162										
150	159	300	28	250	75	182	4.5	10	12	188	3		M24	(7/8")		11.8
	168.3					192										
175	191	350	32	295	82	215	5.6	10	16	285	3	12	M27	(1")	30	18.2
	193.7					218										
200	216	375	34	320	88	240	6.3	10	16	285	3					21.5
	219.1					244										
250	267	450	38	385	105	298	7.1	12	18	345	3					34.9
	273					306										
300	318	515	42	450	115	352	8	12	18	410	4	16	M30	(1-1/8")	33	49.7
	323.9					362										
350	355.6	580	46	510	125	408	8.8	12	20	460	4		M33	(1-1/4")	36	68.1
	368															
400	406.4	660	50	585	135	462	11	12	20	535	4		M36	(1-3/8")	39	96.5
	419															
500	508	755	52	670	140	562	14.2	12	20	615	4	20	M39	(1-	42	

	521												1/2")		117
--	-----	--	--	--	--	--	--	--	--	--	--	--	-------	--	-----

