


# JIS B2220 - 1984 (KSB1503 - 1985) 7KG / CM2

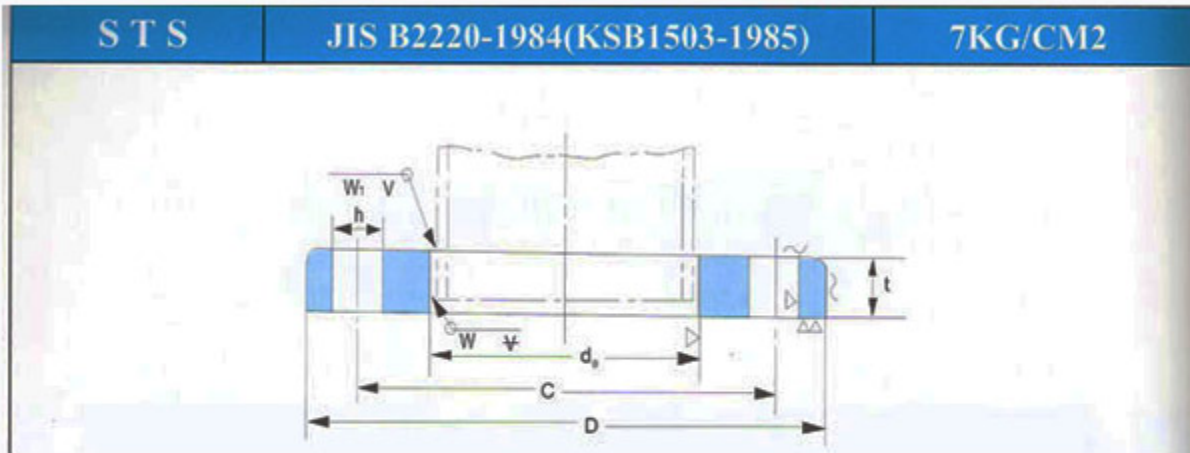

## PLAIN FACE

MM

DN	outside dia. D	inside dia. d0	thickness t	bolt hole circle dia. C	bolt hole dia. h	bolll hole No.	appo. weight kg
15	95	22.2	9	70	12	4	0.45
20	100	27.7	10	75	12	4	0.54
25	125	34.5	12	90	15	4	1
32	135	43.2	12	100	15	4	1.14
40	140	49.1	12	105	15	4	1.2
50	155	61.1	14	120	15	4	1.68
65	175	77.1	14	140	15	4	2.05
80	185	90	14	150	15	8	2.1
90	195	102.6	14	160	15	8	2.21
100	210	115.4	16	175	15	8	2.86
125	250	141.2	18	210	19	8	4.4
150	280	166.6	18	240	19	8	5.3
175	305	192.1	20	265	19	12	6.39
200	330	218	20	290	19	12	7.04
225	350	243.7	20	310	19	12	7.35
250	400	269.5	22	355	23	12	11.1
300	445	321	22	400	23	16	11.95
350	490	358.1	24	445	23	16	14.15
400	560	409	24	510	25	16	22.1