


JIS B2220 - 1984 (KSB1503 - 1985) 16KG/CM2

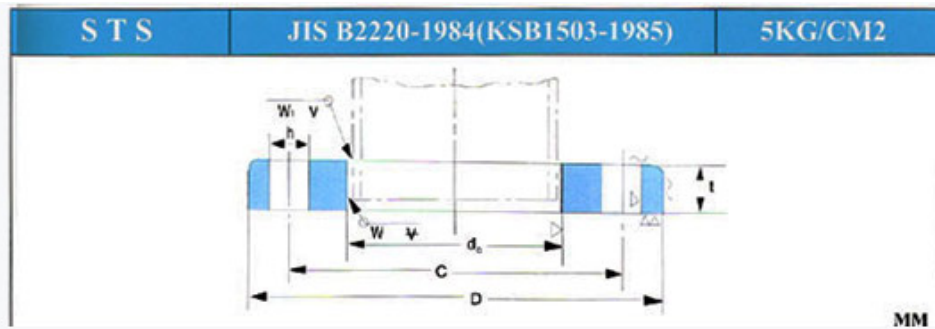

DN	outside dia. D	inside dia. d0	thickness t	bolt hole circle C	bolt hole dia. h	bolt hole No.	appro. weight kg
15	95	22.2	12	70	15	4	0.56
20	100	27.7	14	75	15	4	0.72
25	125	34.5	14	90	19	4	1.13
32	135	43.2	16	100	19	4	1.46
40	140	49.1	16	105	19	4	1.56
50	155	61.1	16	120	19	8	1.7
65	175	77.1	18	140	19	8	2.4
80	200	90	20	160	23	8	3.3
90	210	102.6	20	170	23	8	3.7
100	225	115.4	22	185	23	8	4.5
125	270	141.2	22	225	25	8	6.5
150	305	166.6	24	260	25	12	8.7
200	350	218	26	305	25	12	11.2
250	430	269.5	28	380	27	12	18
300	480	321	30	430	27	16	21.5
350	540	358.1	34	480	33	16	30.8
400	605	409	38	540	33	16	42.8
450	675	460	40	605	33	20	55.1
500	730	511	42	660	33	20	65.1
550	795	562	44	720	39	20	77.9
600	845	613	46	770	39	24	86
650	895	664	48	820	39	24	96.3
700	960	715	50	875	42	24	114.1
750	1020	766	52	935	42	24	132.7
800	1085	817	54	990	48	24	152.1
850	1135	868	56	1040	48	24	166.5
900	1165	919	58	1090	48	28	178.1
1000	1320	1021	62	1210	56	28	235.3
1100	1420	1123	66	1310	56	32	267.9
1200	1530	1224	70	1420	56	32	321.3
1300	1615	1326	74	1530	62	32	378.6
1350	1700	1377	76	1590	62	32	410
1400	1755	1428	78	1640	62	36	436
1500	1965	1529	80	1750	62	36	496.4