


ASA 2500 Dimension



Nom. Pipe Size (inches)	O	Q*	R	X	No. and Dia of Bolt Holes	Bolt Circle Dia.	YY*	H	J	Y*	B	R	YV	BB	C	T	
1/2	5.25	1.19	1.38	1.69	4-0.88	3.50	2.88	0.84	To Be Specified by Purchaser	1.56	.12	1.56	0.90	0.93	1.12	1.12	
3/4	5.50	1.25	1.69	2.00	4-0.88	3.75	3.12	1.05		1.69	.12	1.69	1.11	1.14	1.25		
1	6.25	1.38	2.00	2.25	4-1.00	4.25	3.50	1.32		1.88	.12	1.88	1.38	1.41	1.38		
1 1/4	7.25	1.50	2.50	2.88	4-1.12	5.12	3.75	1.66		2.06	.19	2.06	1.72	1.75	1.50		
1 1/2	8.00	1.75	2.88	3.12	4-1.25	5.75	4.38	1.90		2.38	.25	2.38	1.97	1.99	1.75		
2	9.25	2.00	3.62	3.75	8-1.12	6.75	5.00	2.38		2.75	.31	2.75	2.46	2.50	2.00		
2 1/2	10.50	2.25	4.12	4.50	8-1.25	7.75	5.62	2.88		3.12	.31	3.12	2.97	3.00	2.25		
3	12.00	2.62	5.00	5.25	8-1.38	9.00	6.62	3.50		3.62	.38	3.62	3.60	3.63	2.50		
4	14.00	3.00	6.19	6.50	8-1.62	10.75	7.50	4.50		4.25	.44	4.25	4.60	4.63	2.75		
5	16.50	3.62	7.31	8.00	8-1.88	12.75	9.00	5.56		5.12	.44	5.12	5.69	5.69	3.00		
6	19.00	4.25	8.50	9.25	8-2.12	14.5	10.75	6.63		6.00	.50	6.00	6.75	6.75	3.25		
8	21.75	5.00	10.62	12.00	12-2.12	17.25	12.50	8.63		7.00	.50	7.00	8.75	8.75	3.75		

10	26.5 0	6.5 0	12.7 5	14.7 5	12- 2.62	21.25	16.5 0	10.7 5		9.00	.5 0	9.00	10.9 2	10.8 8	4.2 5	
12	30.0 0	7.2 5	15.0 0	17.3 8	12- 2.88	24.38	18.2 5	12.7 5		10.0 0	.5 0	10.0 0	12.9 2	12.9 4	4.7 5	

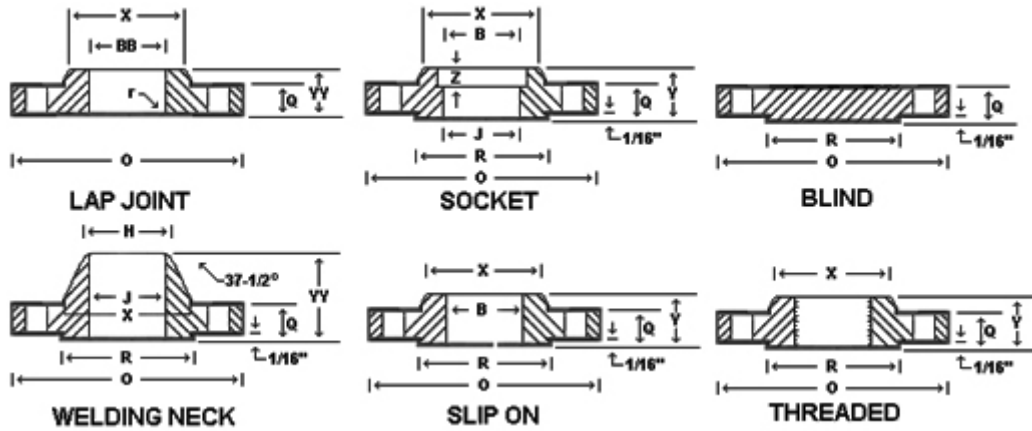